

PREMIUM RANGE

The HQMAG 2-35.5++ electromagnet can be installed embedded style on all types of doors, but also in profiles and compact profiles. It is suitable for both indoor and outdoor use thanks to its anti-corrosion treatment and its unique IP43 protection rating.

TAMPER PROOF DEVICE

Equipped with pads for a discreet fixing by retro-pressure setting in the profile avoiding vandalism.

AN ESSENTIAL REFERENCE IN THE DOOR MANUFACTURING MARKET

For over 35 years, the embedded HQ MAG electromagnets have witnessed an ever-growing success with big names in the door industry. From manufacturers of aluminum profiles to technical doors made of wood or metal, our electromagnets adapt to the terrain's demands. Try embedded HQ MAG electromagnets and you'll be hooked for life!



¹MAIN FEATURES

- Security/Holding Force: Grade 4 (3000 N)
- Category of use: Grade 3 (High frequency - Public use)
- Endurance: Grade 9 (> 1 000 000 de cycles)
- Corrosion resistance/humidity/IP protection: Grade 3 (EN 1670, EN ISO 9227)


¹ See chapter 7 Norm EN 13637.

TECHNICAL DATA

- Mounting: Mortise
- Power: 12/24V DC
- Current: 500 / 250 mA
- Locking monitoring (LSS): Reed Contact
- Built-in MOV surge protection
- ² Environmental protection/IP Rating: IP 43 (Mortise)
- Sizes (L x h x w): 195 x 35,5 x 26 mm
- Weight: ~2 kg
- Accessory: U-bracket, BR HQ35.5 included

² Electrical connections shall be protected according to the installation environment.

MONTAGE

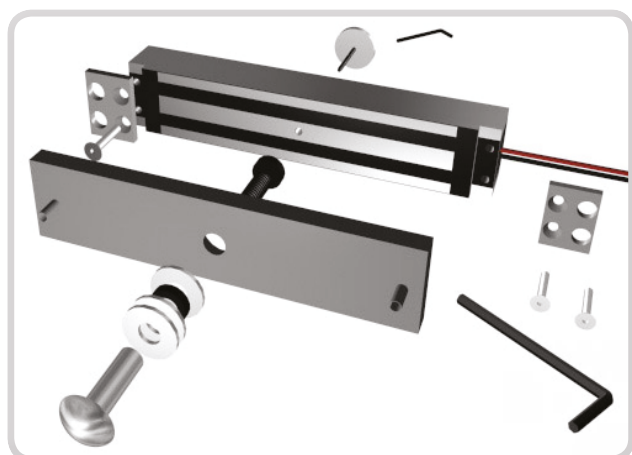

STANDARDISED LABEL


Our main HQMag products features are displayed on the products with a certified sticker responding to the EN 13637, chap 7 norm.

3	9	9	1	2	4	4	0	0	D
---	---	---	---	---	---	---	---	---	---

Ref: EN 13637: + Corrosion EN ISO 9227: Grade 3

TECHNICAL DESIGNS:

1. DIMENSIONS

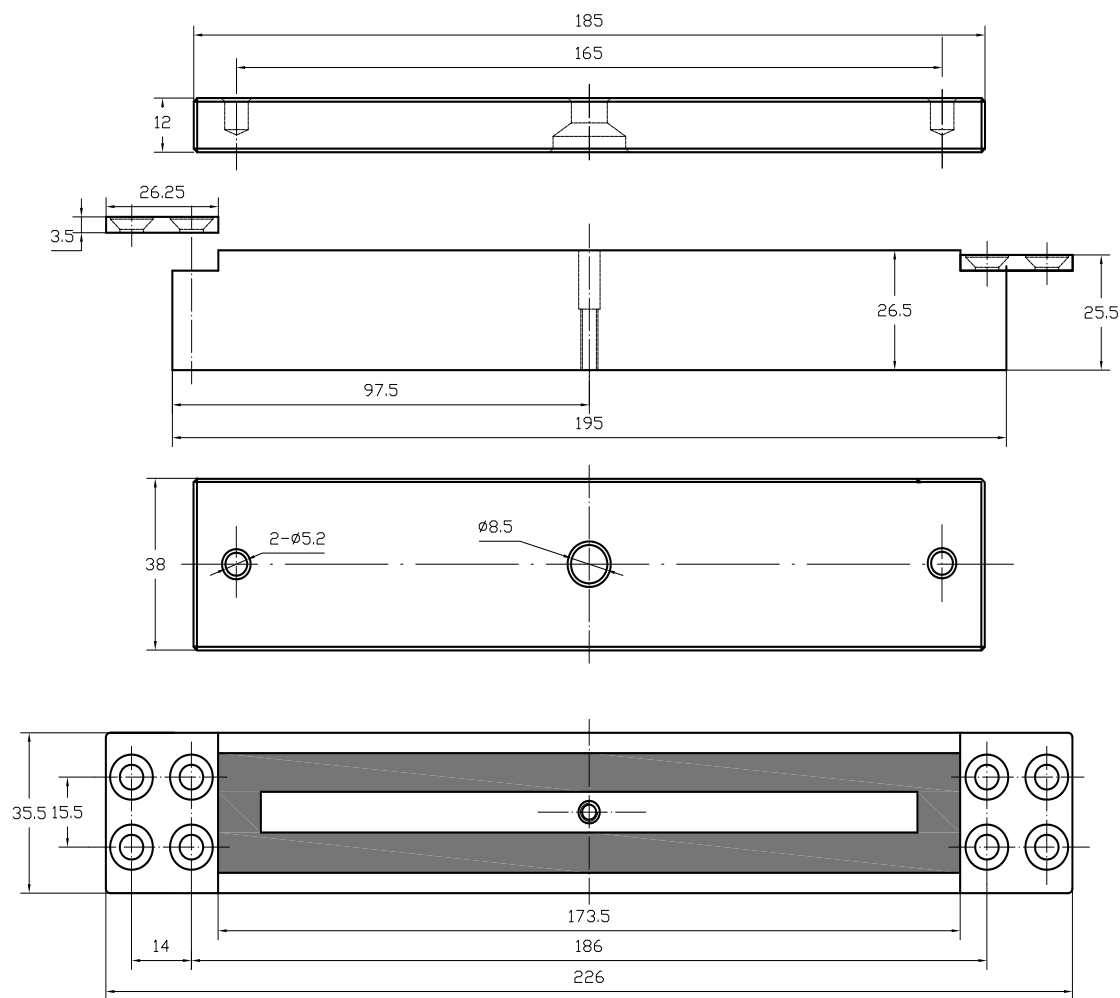

2. WIRING

